

**Art. SMART TWEEZER ST5**

**Art SMART TWEEZER ST-5**

Smart Tweezers™ is a handheld LCR meter of a new concept. It provides a perfect solution for testing and identification of Surface Mount Devices as well as troubleshooting of complex electronic systems.

Its unique mechanical and electronic design combines a pair of precise gold-plated tweezers and a digital LCR meter in compact, lightweight, battery powered instrument. The probe is able to measure resistance, capacitance, inductance with high accuracy and automatic component identification.



**Testing Surface Mount Devices**

Surface mount devices are usually tiny and without wire leads, making it more difficult to test and identify SMD than conventional components. Smart Tweezers™ gives users an easy way to sort and evaluate loose components and to perform on-board measurements and debugging.

Precise gold-plated tweezers are able to pick and reliably contact even the smallest SMD components and take measurements from already mounted devices. The probe can also be used to test conventional components with wire leads too short to insert into the test terminals.

**Lightweight and Ergonomic**

The integrated measurement head allows the operator to use one hand and focus attention on the tested component and on the job at hand. Sorting, testing and troubleshooting become more efficient and cost effective. 4-wire shielded Smart Tweezers™ handles assure low capacitance and resistance offset during measurements.

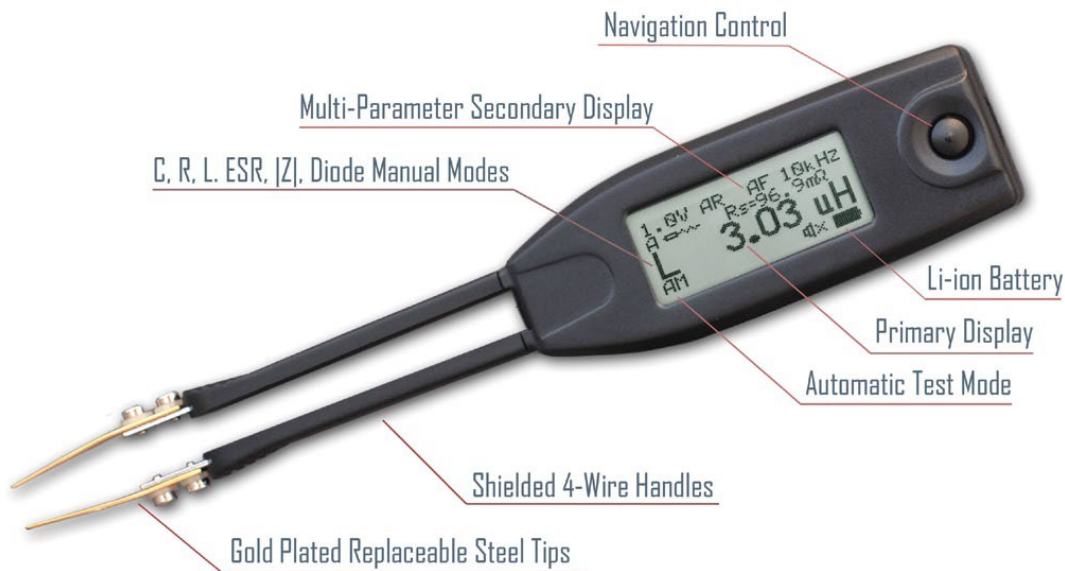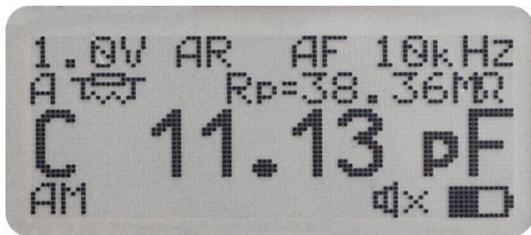

Smart Tweezers™ LCR meter allows you to test various component types, including secondary components of Dissipation Factor (D), Quality Factor (Q).

This handheld also includes other functions that result in a more detailed component analysis.

- ◆ The built-in Equivalent Series Resistance (ESR) mode helps you better understand the inherent resistance - behavior typically found in capacitors across selected frequencies.
- ◆ In its DIODE mode Smart Tweezers™ tests diode polarity and indicates if it is short. • Smart Tweezers™ has a continuity detector. Variable beeper sounds for resistance reading below set thresholds. Additionally, this function helps to locate shorted conductors (e.g. on a PCB).
- ◆ In manual modes Smart Tweezers™ measures a specific circuit parameter — L, C, R, Z or ESR. Manual modes also improve component type identification for in-circuit tests.
- ◆ Variable test signal output from 0.25 to 1.0Vrms allows to improve test precision in different situation e.g. for in-circuit measurement and loose leaded ceramic capacitors. Visible and audible tolerance mode allows to perform component sorting.
- ◆ Math null function allows to store a pre-measured offset and improve measurement precision

## Technical Specifications

- ◆ AC test mode Test frequency: 1 kHz, 10 kHz, 120Hz, 100 Hz
- ◆ Test frequency accuracy: 50 PPM (0.005%)
- ◆ Test signal level: 0.25/0.5/1.0 +/- 5% Vrms Sine wave
- ◆ Source impedance: 62.5Ω/1kΩ/16kΩ +/- 1%

## Measurement Ranges

- ◆ Resistance R: 0.05 Ω to 9.9 MΩ
- ◆ Capacitance C: 0.5 pF to 4999 μF
- ◆ Inductance L: 0.5 uH to 999 mH
- ◆ Quality factor Q: 0.001 to 1000
- ◆ Dissipation factor D: 0.001 to 1000

## Physical Specifications

- ◆ Size 14.0 x 2.5 x 3.0 cm(
- ◆ Weight 53 grams
- ◆ Operating temperature: 0°C to 50°C
- ◆ Battery Type: 3.7V LiPO rechargeable 150mAH
- ◆ Battery Life (continuous) 80 hours, 2 hours charging cycle

## Resistance, impedance.

Range	Resolution	100 Hz	1 kHz	10kHz
1 R	0.001R	0.7% + 50	0.7% + 50	0.7% + 50
10 R	0.01R	0.7% + 8	0.7% + 8	0.7% + 8
100 R	0.01R	0.2% + 3	0.2% + 3	0.2% + 3
1000	0.1R	0.2% + 3	0.2% + 3	0.2% + 3
10 kΩ	0.001K	0.2% + 3	0.2% + 3	0.2% + 3
100 kΩ	0.01K	0.5% + 5	0.5% + 5	0.5% + 5
1000 kΩ	0.1K	0.5% + 5	0.5% + 5	0.5% + 5
10 MΩ	0.001K	2.0% + 8	2.0% + 8	5.0% + 8

Accuracy for the ranges 1 R ~ 100 R is specified after subtract of the offset resistance.

## Capacitance

Range	Resolution	100 Hz	120 Hz	1 kHz	10 kHz
10 mF	0.001 mF	2.0% + 8	2.0% + 8	NA	NA
1000 μF	0.1 μF	0.5% + 5	0.5% + 5	NA	NA
100 μF	0.01 μF	0.3% + 3	0.3% + 3	0.5% + 5	NA
10 μF	0.001 μF	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 5
1 μF	0.1 nF	0.2% + 3	0.2% + 3	0.2% + 3	0.2% + 3
100 nF	0.01 nF	0.2% + 3	0.2% + 3	0.2% + 3	0.5% + 3
10 nF	0.001 nF	0.5% + 5	0.5% + 5	0.2% + 3	0.5% + 3
1000 pF1	0.1 pF	NA	NA	0.5% + 5	0.5% + 3
100 pF1	0.01 pF	NA	NA	0.5% + 10	0.8% + 20
10 pF1	0.001 pF	NA	NA	NA	1.0% + 50

Accuracy for the ranges of 10 pF~1000 pF is specified after subtract of the stray capacitances for test leads.

## Inductance

Range	Resolution	100 Hz	1 kHz	10 kHz
10 μH	0.001 μH	NA	NA	1.0% + 5
100 μH	0.01μH	NA	1.0% + 5	0.7% + 3
1 mH	0.1 μH	0.7% + 10	0.5% + 3	0.5% + 3
10 mH	0.001 mH	0.5% + 3	0.2% + 3	0.5% + 3
100 mH	0.01 mH	0.5% + 3	0.2% + 3	NA
1 H	0.1 mH	0.2% + 3	NA	NA

## TIPS AVAILABLE



**STANDARD**



**SHARP HIGH PRECISION**



**BENT**

## MAIN APPLICATIONS

- ◆ Built-in high-precision LCR probe
- ◆ Convenient one-hand operation
- ◆ Ideal for Surface Mount Devices
- ◆ Automated component identification
- ◆ Automated test range selection
- ◆ Manual C, R, L, Z and ESR modes
- ◆ Adjustable test signal levels
- ◆ Precise tips for small-size devices
- ◆ Diode Polarity/Short Testing
- ◆ Secondary D, Q and ESR parameters
- ◆ Portable and ergonomic design
- ◆ Built-in Li-Ion battery

EUROSAFT srl  
Via San Vito 18  
20123 Milano  
Ph +39 348 7654431  
eurosaft@gmail.com  
infoesd@elme.it

